


CHAPTER 3


Specifications

Complete specifications for the OEM770 Drive and Parker Compumotor SM, NeoMetric, and J Series motors are listed in this chapter.


The motors are described by the following numbering system:

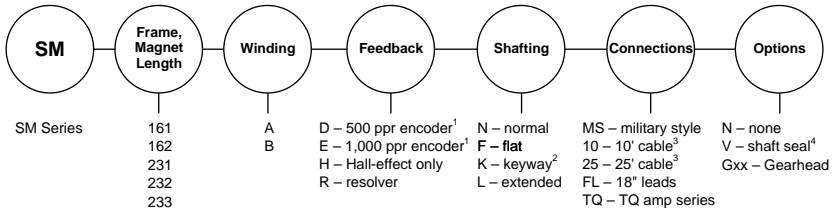

- ¹ includes Hall-effect
² not available on size 16
³ cable is hard-wired
⁴ size 23 w/MS or TQ connectors—IP65

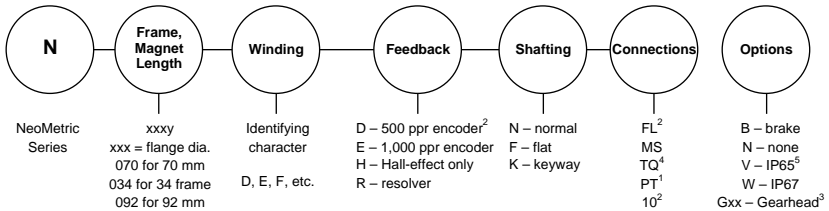

- ¹ 92 mm motors only
² 70 mm and 34 frame motors only
³ 34 frame motors only
⁴ Not available on 92 mm motors
⁵ IP65 when specified with MS or TQ connections

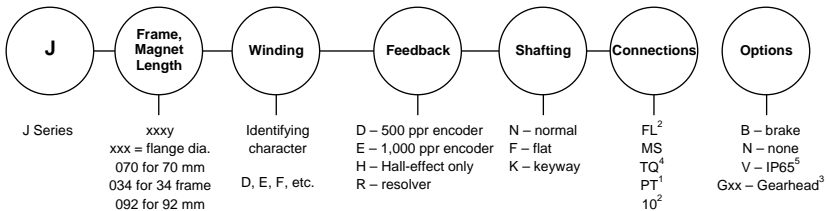

- ¹ 92 mm motors only
² 70 mm motors only
³ 34 frame motors only
⁴ Not available on 92 mm motors
⁵ IP65 when specified with MS or TQ connections

Specifications: OEM770T Torque Drive

OEM770T Torque Drive – Specifications		
POWER INPUT		
	Voltage	24-75VDC
	Current	Ø-12 amps
POWER OUTPUT—MOTOR		
	Peak Current	12A (approx 2 sec maximum duration at 45°C ambient temperature. See <i>Current Foldback</i> for details)
	Continuous Current	6A
	Voltage	90VDC maximum
	Peak Power	840W (1.1 hp) (@75V supply voltage)
	Continuous Power	420W (0.56 hp)
	Switching Frequency	20 kHz
	Bandwidth	2 kHz typical (dependant on motor)
	Transconductance	1 volt = 1.2 amp
	Commutation	120° Hall Effect Sensors for Six-State Commutation Method, or Brushed DC Motor
	Short Circuit Protected	Yes
POWER OUTPUT—HALL EFFECT SENSORS		
	Voltage	+5VDC ± 0.5VDC
	Current	50 mA (maximum)
	Overload Protected	YES
POWER OUTPUT—TO CONTROLLER OUTPUT STAGE		
	Voltage	+15VDC ± 1.5VDC
		-15VDC ± 1.5VDC
	Current	10 mA maximum, each output
	Short Circuit Protected	NO
POWER OUTPUT—TO ENCODER		
	Voltage	+5VDC
	Current	200 mA maximum, each output
	Overload Protected	YES
CONTROL INPUTS		
	Command Input	-10V to +10V analog voltage 1 volt input = 1.2 amp output
	Enable Input	Active LOW: Ø-0.8V @ 2mA When disabled: Internal 2.49 KΩ pullup resistor to +5VDC
HALL INPUTS		
	Low State	Ø-0.8V
	High State	Internal 1 KΩ pullup resistor to +5V
	Input Frequency	Ø-2 kHz maximum

OEM770T Torque Drive – Specifications (contin.)

SIGNAL OUTPUTS

Fault Output	Active HIGH: open collector output, maximum volts = 24VDC
	Inactive LOW: \emptyset -0.4VDC at \emptyset -20 mA
Current Monitor	-10V to +10V analog voltage
	Scale: 1V corresponds to 1.2A output
LEDs	Output Impedance: 10 K Ω
	GREEN: power
	RED: various fault conditions see <i>Troubleshooting</i> for details

PROTECTIVE CIRCUITS

Short Circuit	Turns Off Outputs to Motor; Latched
Over Temperature	55°C \pm 5°C trip temperature; Latched
Overvoltage	95V \pm 5V trip voltage; Latched
Undervoltage	21.5V maximum; not Latched
Current Foldback	Configurable with 3 resistors see <i>Special Internal Circuits</i> for details

MOTOR CHARACTERISTICS

Minimum Inductance	50 μ H (micro Henrys)
Minimum Resistance	0.25 Ω
Loop Gain Adjustment	Configurable with one resistor see <i>Special Internal Circuits</i> for details

TEMPERATURE

Minimum Temperature	\emptyset °C (32°F)
Maximum Temperature	45°C (113°F) (max. heatplate temp.)
Storage Temperature	-30°C to 85°C (-22°F to 185°F)
Package Dissipation	Heatplate: 0 to 30W, depending on motor current; $P = (I_{AVG}/12 A)30 W$ Cover: 3 watts maximum
Humidity	0 to 95% non condensing
Contaminants	OEM770T is not waterproof, oilproof, or dustproof.

MECHANICAL

Power Connector	10 pin screw terminal
	14 AWG (2.5 mm ²) maximum wire size
Input/Output Connector	25 Pin D-connector
Size	5x1.6x3.5 in (127x41x89 mm) approx.
Dimensions	see <i>Chapter 2 Installation</i>
Weight	12 ounces (0.35 kg)

Specifications: OEM770SD Step & Direction Drive

OEM770SD Step & Direction Drive		
POWER INPUT		
	Voltage	24-75VDC
	Current	Ø-12 amps
POWER OUTPUT—MOTOR		
	Peak Current	12A (approx 2 sec maximum duration at 45°C ambient temperature. See <i>Current Foldback</i> for details)
	Continuous Current	6A
	Voltage	90VDC maximum
	Peak Power	840W (1.1 hp) (@75V supply voltage)
	Continuous Power	420W (0.56 hp)
	Switching Frequency	20 kHz
	Bandwidth	2 kHz typical (dependant on motor)
	Transconductance	1 volt = 1.2 amp
	Commutation	120° Hall Effect Sensors for Six-State Commutation Method, or Brushed DC Motor
	Short Circuit Protected	Yes
POWER OUTPUT—HALL EFFECT SENSORS		
	Voltage	+5VDC ± 0.5VDC
	Current	50 mA (maximum)
	Overload Protected	YES
POWER OUTPUT—TO ENCODER		
	Voltage	+5VDC
	Current	200 mA maximum, each output
	Overload Protected	YES
CONTROL INPUTS		
	Step+/Step-	5V maximum input Input current: 12 mA max., 6.3 mA min.
	Direction+/Direction-	5V maximum input Input current: 12 mA max., 6.3 mA min. Pos. input = clockwise motor rotation
HALL INPUTS		
	Low State	Ø-0.8V
	High State	Internal 1 KΩ pullup resistor to +5V
	Input Frequency	Ø-2 kHz maximum

OEM770SD Step & Direction Drive (contin.)

SIGNAL OUTPUTS

Fault Output-Isolated	50V max voltage, 10 mA max current
Fault Output-Not Isolat.	24V max voltage, 20 mA max current
Velocity Monitor	1V per 10 kHz pre-quad. encoder freq.
Current Monitor	1V output per 1.2A motor current
	Output Impedance: 10 K Ω
LEDs	GREEN: power
	RED: various fault conditions
	see <i>Troubleshooting</i> for details

PROTECTIVE CIRCUITS

Short Circuit	Turns Off Outputs to Motor; Latched
Over Temperature	55°C \pm 5°C trip temperature; Latched
Overvoltage	95V \pm 5V trip voltage; Latched
Undervoltage	21.5V maximum; not Latched
Current Foldback	Configurable with 3 resistors
	see <i>Special Internal Circuits</i> for details
Position Error	2047–16383 post-quad encoder counts

MOTOR CHARACTERISTICS

Minimum Inductance	50 μ H (micro Henrys)
Minimum Resistance	0.25 Ω
Loop Gain Adjustment	Configurable with one resistor
	see <i>Special Internal Circuits</i> for details

TEMPERATURE

Minimum Temperature	0°C (32°F)
Maximum Temperature	45°C (113°F) (max. heatplate temp.)
Storage Temperature	-30°C to 85°C (-22°F to 185°F)
Package Dissipation	Heatplate: 0 to 30W, depending on motor current; $P = (I_{AVG}/12 A)30 W$
	Cover: 3 watts maximum
Humidity	0 to 95% non condensing
Contaminants	OEM770SD is not waterproof, oilproof, or dustproof.

MECHANICAL

Power Connector	10 pin screw terminal
	14 AWG (2.5 mm ²) maximum wire size
Input/Output Connector	25 Pin D-connector
Size	5x1.6x3.5 in (127x41 x89 mm) approx.
Dimensions	see <i>Chapter 2 Installation</i>
Weight	14 ounces (0.4 kg)

3 Specifications • OEM770

Motor Specifications: SM160

Parameter	Symbol	Units	SM160A	SM160B
Stall Torque Continuous ¹	T_{cs}	lb-in/oz-in	0.8/13	0.8/13
		N-m	0.09	0.09
Stall Current Continuous ¹	I_{cs} (trap)	Amps DC	2.5	4.8
Rated Speed ²	ω_r	rpm	7500	7500
Peak Torque ⁶	T_{pk}	lb-in/oz-in	2.5/40	2.5/40
		N-m	0.28	0.28
Peak Current ⁶	I_{pk} (trap)	Amps DC	7.4	14.4
Torque @ Rated Speed	T_r	lb-in/oz-in	0.6/10	0.6/10
		N-m	0.07	0.07
Rated Power—Output Shaft	P_o	watts	57	55
Voltage Constant ^{3,4}	K_b	volts/radian/sec	0.038	0.020
Voltage Constant ^{3,4}	K_e	volts/KRPM	4.02	2.08
Torque Constant ^{3,4}	K_t (trap)	oz-in/Amp DC	5.43	2.81
		N-m/Amp DC	0.038	0.020
Resistance ³	R	ohms	3.43	0.90
Inductance ⁵	L	millihenries	0.53	0.13
Thermal Resistance	R_{th} w-a	°C/watt	3.2	3.2
Motor Constant	Km	oz-in/ \sqrt{watt}	2.93	2.96
		N-m/ \sqrt{watt}	0.021	0.021
Viscous Damping	B	oz-in/Krpm	0.162	0.162
		N-m/Krpm	1.13E-3	1.13E-3
Static Friction	T_f	oz-in	0.10	0.10
		N-m	7.0E-4	7.0E-4
Thermal Time Constant	τ_{th}	minutes	10	10
Electrical Time Constant	τ_e	milliseconds	0.16	0.15
Mechanical Time Constant	τ_m	milliseconds	11.7	11.5
Rotor Inertia	J	lb-in-sec ²	4.4E-5	4.4E-5
		kg-m ²	5.0E-6	5.0E-6
Weight	#	pounds	0.7	0.7
		kg	0.3	0.3
Winding Class			H	H

¹ @ 25°C ambient, 125°C winding temperature, motor connected to a 10"x10"x1/4" aluminum mounting plate, @ 40°C ambient, derate phase currents and torques by 12%.

² Maximum speed is 7500RPM with 500 line encoder. For 1000 line encoders, derate to 6000RPM. For higher speed operation, please call the factory.

³ Measured line-to-line, $\pm 10\%$ line-to-line.

⁴ Value is measured peak of sine wave.

⁵ $\pm 30\%$ line-to-line, inductance bridge measurement @ 1 kHz.

⁶ Initial winding temperature must be 60°C or less before peak current is applied.

Note: These specifications are based on theoretical motor performance and are not specific to any amplifier.

Motor Specifications: SM161 and SM162

Parameter	Symbol	Units	SM161A	SM161B	SM162A	SM162B
Stall Torque Continuous ¹	T_{cs}	lb-in/oz-in	1.6/26	1.6/26	2.9/47	3.1/49
		N-m	0.18	0.18	0.33	0.34
Stall Current Continuous ¹	I_{cs} (trap)	Amps DC	2.3	4.5	2.3	4.4
Rated Speed ²	ω_r	rpm	7,500	7,500	7,500	7,500
Peak Torque ⁶	T_{pk}	lb-in/oz-in	4.9/78	4.9/78	8.8/141	9.1/145
		N-m	0.55	0.54	0.99	1.02
Peak Current ⁶	I_{pk} (trap)	Amps DC	7.0	13.4	6.8	13.2
Torque @ Rated Speed	T_r	lb-in/oz-in	1.1/18	1.1/18	2.3/37	2.3/37
		N-m	0.13	0.13	0.26	0.26
Rated Power—Output Shaft	P_o	watts	97	100	205	204
Voltage Constant ^{3,4}	K_b	volts/radian/sec	0.079	0.041	0.147	0.078
Voltage Constant ^{3,4}	K_e	volts/KRPM	8.27	4.29	15.39	8.17
Torque Constant ^{3,4}	K_t (trap)	oz-in/Amp DC	11.19	5.81	20.82	11.04
		N-m/Amp DC	0.078	0.041	0.146	0.077
Resistance ³	R	ohms	4.53	1.24	6.50	1.73
Inductance ⁵	L	millihenries	0.81	0.21	1.39	0.33
Thermal Resistance	R_{th} w-a	°C/watt	2.70	2.70	2.00	2.00
Motor Constant	Km	oz-in/ $\sqrt{\text{watt}}$	5.26	5.21	8.16	8.40
		N-m/ $\sqrt{\text{watt}}$	0.037	0.036	0.057	0.059
Viscous Damping	B	oz-in/Krpm	0.284	0.284	0.300	0.300
		N-m/Krpm	1.99E-3	1.99E-3	2.1E-3	2.1E-3
Static Friction	T_f	oz-in	0.15	0.15	0.20	0.20
		N-m	1.05E-3	1.05E-3	1.40E-3	1.40E-3
Thermal Time Constant	τ_{th}	minutes	11.6	11.6	14.2	14.2
Electrical Time Constant	τ_e	milliseconds	0.18	0.17	0.21	0.19
Mechanical Time Constant	τ_m	milliseconds	7.7	7.8	5.5	5.2
Rotor Inertia	J	lb-in-sec ²	9.4E-5	9.4E-5	1.6E-4	1.6E-4
		kg-m ²	1.1E-5	1.1E-5	1.8E-5	1.8E-5
Weight	#	pounds	1.1	1.1	1.6	1.6
		kilograms	0.5	0.5	0.7	0.7
Winding Class			H	H	H	H

¹ @ 25°C ambient, 125°C winding temperature, motor connected to a 10"x10"x1/4" aluminum mounting plate, @ 40°C ambient, derate phase currents and torques by 12%.

² Maximum speed is 7500RPM with 500 line encoder. For 1000 line encoders, derate to 6000RPM. For higher speed operation, please call the factory.

³ Measured line-to-line, $\pm 10\%$ line-to-line.

⁴ Value is measured peak of sine wave.

⁵ $\pm 30\%$ line-to-line, inductance bridge measurement @ 1 kHz.

⁶ Initial winding temperature must be 60°C or less before peak current is applied.

Note: These specifications are based on theoretical motor performance and are not specific to any amplifier.

3 Specifications • OEM770

Motor Specifications: SM230 and SM231

Parameter	Symbol	Units	SM230A	SM230B	SM231A	SM231B
Stall Torque Continuous ¹	T_{cs}	lb-in/oz-in	1.7/27	1.6/26	3.8/61	3.4/54
		N-m	0.19	0.18	0.43	0.38
Stall Current Continuous ¹	I_{cs} (trap)	Amps DC	2.4	4.7	2.5	4.8
Rated Speed ²	ω_r	rpm	7500	7500	7,500	7,500
Peak Torque ⁶	T_{pk}	lb-in/oz-in	5.1/82	4.9/78	11.3/181	10.0/160
		N-m	0.57	0.55	1.27	1.12
Peak Current ⁶	I_{pk} (trap)	Amps DC	7.1	14.2	7.6	14.3
Torque @ Rated Speed	T_r	lb-in/oz-in	1.4/22	1.3/21	2.9/47	2.8/44
		N-m	0.15	0.15	0.33	0.31
Rated Power—Output Shaft	P_o	watts	122	116	261	244
Voltage Constant ^{3,4}	K_b	volts/radian/sec	0.081	0.039	0.169	0.079
Voltage Constant ^{3,4}	K_e	volts/KRPM	8.48	4.09	17.70	8.27
Torque Constant ^{3,4}	K_t (trap)	oz-in/Amps DC	11.47	5.54	23.93	11.19
		N-m/Amps DC	0.080	0.039	0.168	0.078
Resistance ³	R	ohms	4.43	1.12	5.22	1.46
Inductance ⁵	L	millihenries	1.19	0.28	1.64	0.44
Thermal Resistance	R_{th} w-a	°C/watt	2.67	2.67	2.00	2.00
Motor Constant	Km	oz-in/ \sqrt{watt}	5.45	5.23	10.47	9.26
		N-m/ \sqrt{watt}	0.038	0.037	0.073	0.065
Viscous Damping	B	oz-in/Krpm	0.160	0.160	0.250	0.250
		N-m/Krpm	1.12E-3	1.12E-3	1.75E-3	1.75E-3
Static Friction	T_f	oz-in	0.20	0.20	0.30	0.30
		N-m	1.4E-3	1.4E-3	2.10E-3	2.10E-3
Thermal Time Constant	τ_{th}	minutes	18.3	18.3	20	20
Electrical Time Constant	τ_e	milliseconds	0.27	0.25	0.31	0.30
Mechanical Time Constant	τ_m	milliseconds	18.3	19.9	9.5	12.2
Rotor Inertia	J	lb-in-sec ²	2.4E-4	2.4E-4	4.6E-4	4.6E-4
		kg-m ²	2.7E-5	2.7E-5	5.2E-5	5.2E-5
Weight	#	pounds	1.2	1.2	2.1	2.1
		kilograms	0.5	0.5	1.0	1.0
Winding Class			H	H	H	H

¹ @ 25°C ambient, 125°C winding temperature, motor connected to a 10"x10"x1/4" aluminum mounting plate, @ 40°C ambient derate phase currents and torques by 12%.

² Maximum speed is 7500RPM with 500 line encoder. For 1000 line encoders, derate to 6000RPM. For higher speed operation, please call the factory.

³ Measure line-to-line, $\pm 10\%$ line-to-line.

⁴ Value is measured peak of sine wave.

⁵ $\pm 30\%$, line-to-line, inductance bridge measurement @ 1 kHz.

⁶ Initial winding temperature must be 60°C or less before peak current is applied.

Note: These specifications are based on theoretical motor performance and are not specific to any amplifier.

Motor Specifications: SM232 and SM233

Parameter	Symbol	Units	SM232A	SM232B	SM233A	SM233B
Stall Torque Continuous ¹	T_{cs}	lb-in/oz-in	6.6/106	7.0/111	10.1/161	9.7/156
		N-m	0.74	0.78	1.13	1.09
Stall Current Continuous ¹	I_{cs} (trap)	Amps DC	2.4	4.7	2.4	4.5
Rated Speed ²	ω_r	rpm	7,500	7,500	5,800	5,800
Peak Torque ⁶	T_{pk}	lb-in/oz-in	19.8/316	20.9/334	30.2/483	29.2/467
		N-m	2.21	2.34	3.38	3.27
Peak Current ⁶	I_{pk} (trap)	Amps DC	7.2	14.0	7.1	13.6
Torque @ Rated Speed	T_r	lb-in/oz-in	5.1/81	5.4/86	8.1/129	7.6/121
		N-m	0.57	0.60	0.90	0.85
Rated Power—Output Shaft	P_o	watts	449	477	553	519
Voltage Constant ^{3,4}	K_b	volts/radian/sec	0.310	0.169	0.484	0.242
Voltage Constant ^{3,4}	K_e	volts/KRPM	32.46	17.70	50.68	25.34
Torque Constant ^{3,4}	K_t (trap)	oz-in/Amp DC	43.90	23.93	68.53	34.27
		N-m/Amp DCs	0.307	0.168	0.480	0.240
Resistance ³	R	ohms	7.50	2.00	9.65	2.58
Inductance ⁵	L	millihenries	2.90	0.78	4.08	1.06
Thermal Resistance	R_{th} w-a	°C/watt	1.54	1.54	1.25	1.25
Motor Constant	Km	oz-in/ \sqrt{watt}	16.03	16.92	22.06	21.33
		N-m/ \sqrt{watt}	0.112	0.118	0.154	0.149
Viscous Damping	B	oz-in/Krpm	0.360	0.360	0.540	0.540
		N-m/Krpm	2.52E-3	2.52E-3	3.78E-3	3.78E-3
Static Friction	T_f	oz-in	0.70	0.70	1.00	1.00
		N-m	4.90E-3	4.90E-3	7.00E-3	7.00E-3
Thermal Time Constant	τ_{th}	minutes	21.6	21.6	23.3	23.3
Electrical Time Constant	τ_e	milliseconds	0.39	0.39	0.42	0.41
Mechanical Time Constant	τ_m	milliseconds	7.2	6.5	5.4	5.8
Rotor Inertia	J	lb-in-sec ²	8.2E-4	8.2E-4	1.2E-3	1.2E-3
		kg-m ²	9.3E-5	9.3E-5	1.3E-4	1.3E-4
Weight	#	pounds	3.0	3.0	3.9	3.9
		kilograms	1.4	1.4	1.8	1.8
Winding Class			H	H	H	H

¹ @ 25°C ambient, 125°C winding temperature, motor connected to a 10"x10"x1/4" aluminum mounting plate, @ 40°C ambient, derate phase currents and torques by 12%.

² Maximum speed is 7500RPM with 500 line encoder. For 1000 line encoders, derate to 6000RPM. For higher speed operation, please contact factory.

³ Measured line-to-line, $\pm 10\%$ line-to-line.

⁴ Value is measured peak of sine wave.

⁵ $\pm 30\%$, line-to-line, inductance bridge measurement @ 1 kHz.

⁶ Initial winding temperature must be 60°C or less before peak current is applied.

Note: These specifications are based on theoretical motor performance and are not specific to any amplifier.

3 Specifications • OEM770

Motor Specifications: NeoMetric & J Series

Parameter	Symbol	Units	N0701 or N0341		N0702 or N0342	
			D	F	E	F
Winding Selection						
Stall Torque Continuous ¹	T_{cs}	lb-in N-m	5.7 0.63	5.6 0.63	10.4 1.17	10.4 1.16
Stall Current Continuous ¹	I_{cs} (trap)	Amps DC	2.9	4.5	3.3	4.6
Rated Speed ²	ω_r	rpm	7500	7500	7500	7500
Peak Torque ⁶	T_{pk}	lb-in N-m	17.0 1.90	16.8 1.88	31.2 3.50	31.1 3.49
Peak Current ⁶	I_{pk} (trap)	Amps DC	8.7	13.5	10.0	13.9
Torque @ Rated Speed	T_r	lb-in N-m	4.7 0.53	4.6 0.52	7.1 0.80	7.9 0.88
Rated Power—Output Shaft	P_o	watts	416	411	632	699
Voltage Constant ^{3,4}	K_b	volts/radian/sec	0.221	0.140	0.353	0.253
Voltage Constant ^{3,4}	K_e	volts/KRPM	23.14	14.66	36.97	26.49
Torque Constant ^{3,4}	K_t (trap)	oz-in/Amp DC N-m/Amp DC	31.29 0.219	19.82 0.139	49.98 0.350	35.82 0.251
Resistance ³	R	ohms	5.52	2.27	5.22	2.70
Inductance ⁵	L	millihenries	12.98	5.23	15.80	8.16
Thermal Resistance	R_{th} w-a	°C/watt	1.44	1.44	1.15	1.15
Motor Constant	Km	oz-in/ \sqrt{watt} N-m/ \sqrt{watt}	13.32 0.093	13.16 0.092	21.88 0.153	21.80 0.153
Viscous Damping	B	oz-in/Krpm N-m/Krpm	0.2 1.4E-3	0.2 1.4E-3	0.4 2.8E-3	0.4 2.8E-3
Static Friction	T_f	oz-in N-m	0.8 5.6E-3	0.8 5.6E-3	1.6 1.2E-2	1.6 1.2E-2
Thermal Time Constant	τ_{th}	minutes	16.6	16.6	21.7	21.7
Electrical Time Constant	τ_e	milliseconds	2.35	2.30	3.03	3.02
NeoMetric Mech. Time Const.	τ_{mch}	milliseconds	1.6	1.7	0.6	0.6
J Series Mech. Time Const.	τ_{mch}	milliseconds	14.7	14.7	5.7	5.7
NeoMetric Rotor Inertia	J	lb-in-sec ² kg-m ²	1.1E-4 1.2E-5	1.1E-4 1.2E-5	1.7E-4 2.0E-5	1.7E-4 2.0E-5
J Series Rotor Inertia	J	lb-in-sec ² kg-m ²	1.1E-3 1.3E-4	1.1E-3 1.3E-4	1.2E-3 1.4E-4	1.2E-3 1.4E-4
NeoMetric Weight	# kg	pounds kilograms	3.5 1.6	3.5 1.6	4.5 2.1	4.5 2.1
J Series Weight	# kg	pounds kilograms	4.4 2.0	4.4 2.0	5.4 2.5	5.4 2.5
Winding Class				H		H

@ 25°C ambient, 125°C winding temperature, motor connected to a 10"x10"x1/4" aluminum mounting plate, @ 40°C ambient, derate phase currents and torques by 12%.

² Maximum speed is 7500RPM with 500 line encoder. For 1000 line encoders, derate to 6000RPM. For higher speed operation, please contact factory.

³ Measured line-to-line, $\pm 10\%$ line-to-line.







⁴ Value is measured peak of sine wave.

⁵ $\pm 30\%$, line-to-line, inductance bridge measurement @ 1 kHz.

⁶ Initial winding temperature must be 60°C or less before peak current is applied.

Note: These specifications are based on theoretical motor performance and are not specific to any amplifier.

Speed/Torque Curves²: SM 160, SM161 and SM162



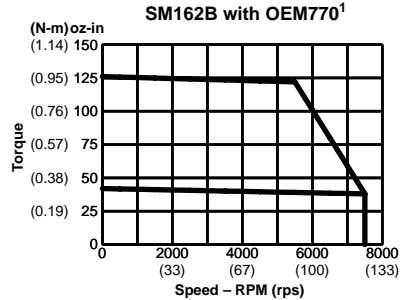
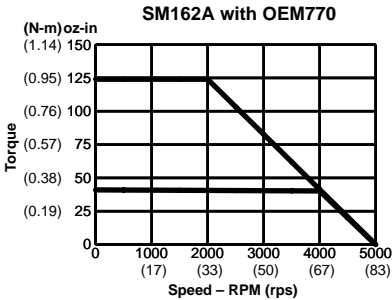
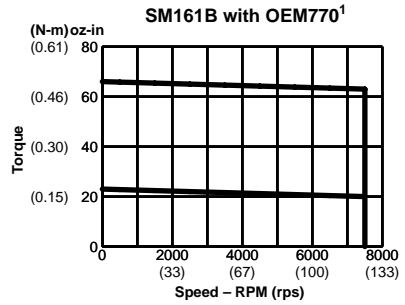
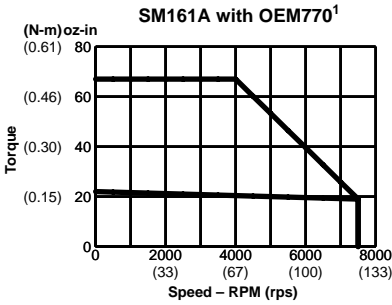
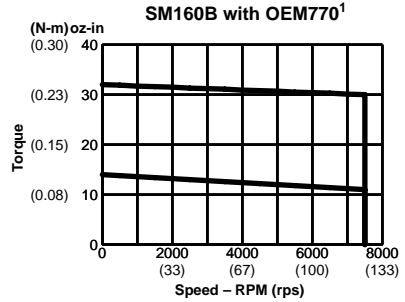
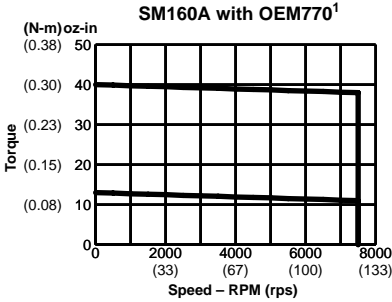


¹ For "E" encoder option (1000 ppr), maximum velocity is 6,000 rpm (100 rps).

² With 75VDC bus voltage; 25°C (77°F) ambient temperature.

3 Specifications • OEM770





Speed/Torque Curves²: SM230, SM231, SM232, SM233

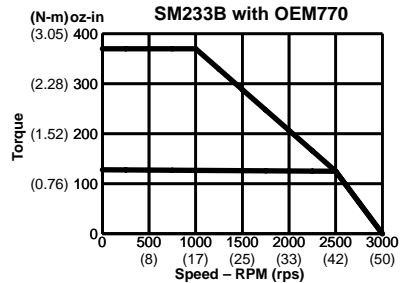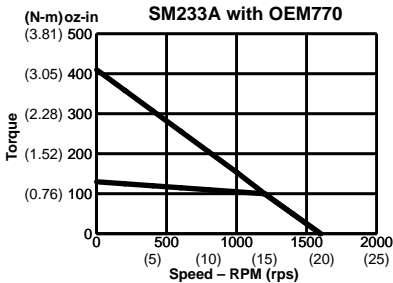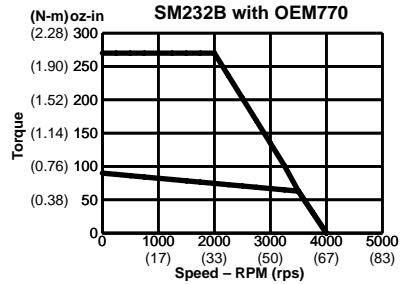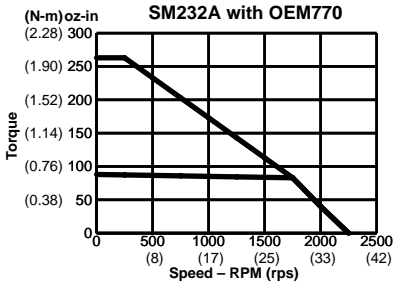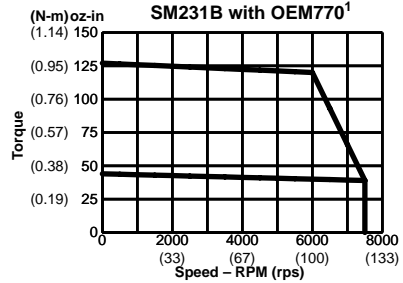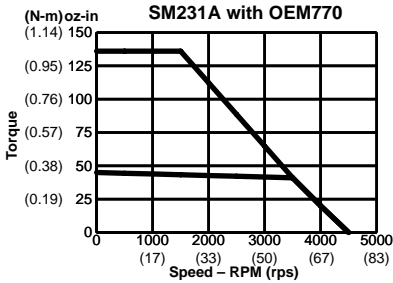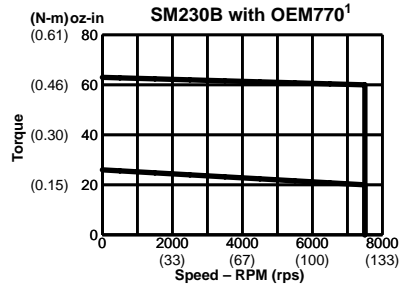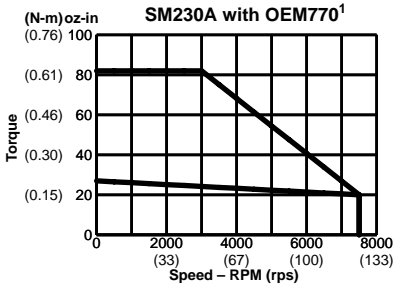

¹ For "E" encoder option (1000 ppr), maximum velocity is 6,000 rpm (100 rps).



² With 75VDC bus voltage; 25°C (77°F) ambient temperature.

Speed/Torque Curves¹: NeoMetric Motors

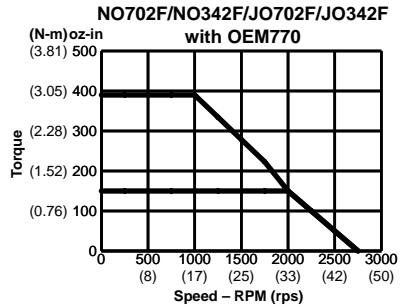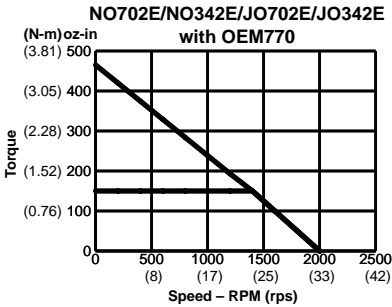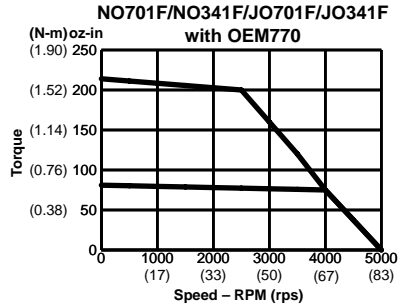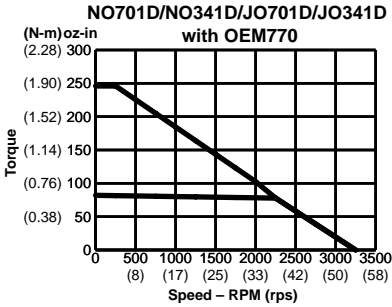


¹ With 75VDC bus voltage; 25°C (77°F) ambient temperature.

Motor Dimensions: Compumotor SM160 and SM230

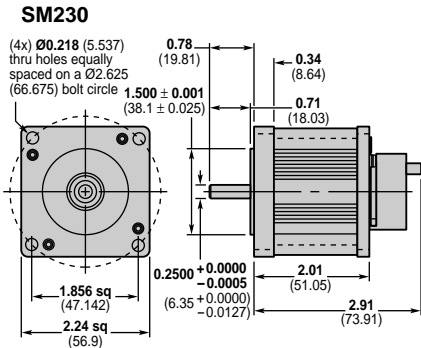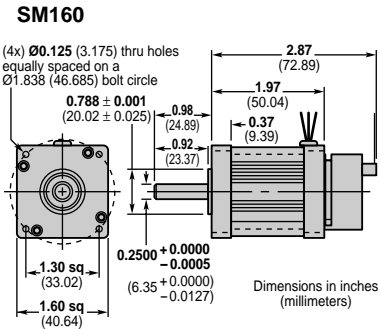


3 Specifications • OEM770

Motor Dimensions: Compumotor SM Series, Size 16

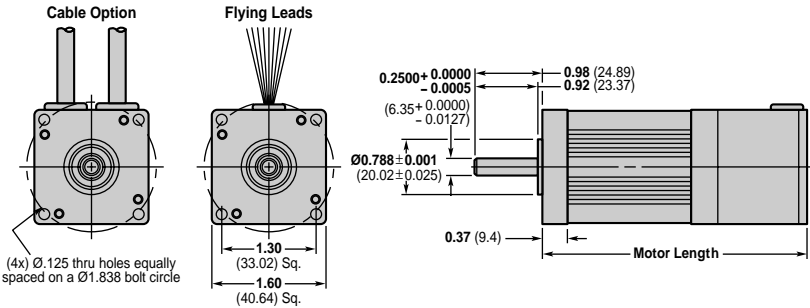

Cable Options	
Part #	Description
- FL	18" Flying Leads
- 10	10 ft. Cable


Longer lengths available
Consult Compumotor for information



Dimensions in inches (millimeters)


Motor Sizes	
Motor Length	Model
4.79 (121.66)	162 Motor
3.79 (96.27)	161 Motor

Motor Dimensions: Compumotor SM Series, Size 23

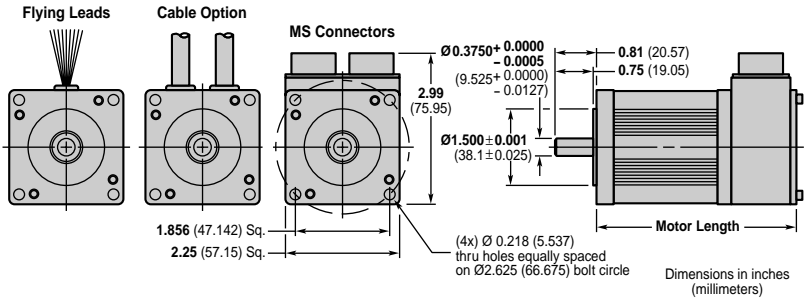

Cable Options	
Part #	Description
- FL	18" Flying Leads
- 10	10 ft. Cable


Longer lengths available
Consult Compumotor for information

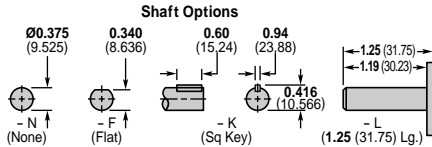


Dimensions in inches (millimeters)

Motor Sizes	
Motor Length	Model
5.98 (151.89)	233 Motor
4.98 (126.49)	232 Motor
3.98 (101.09)	231 Motor

Motor Dimensions: NeoMetric & J Series, Size 70

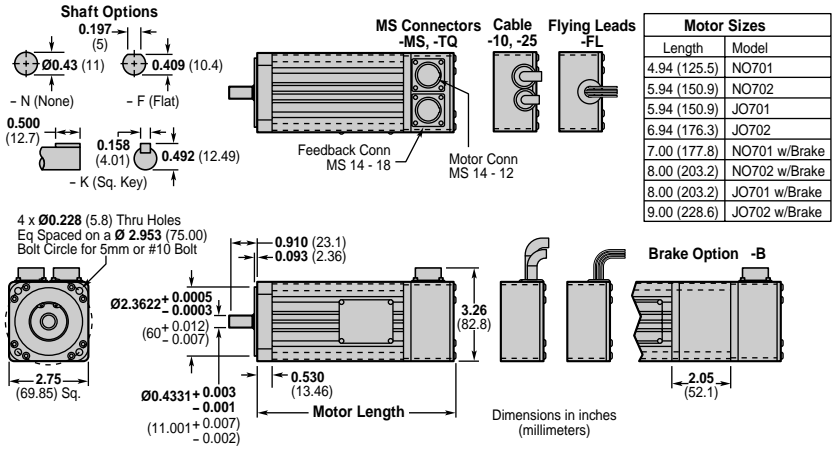

Motor Dimensions: NeoMetric & J Series, Size 34

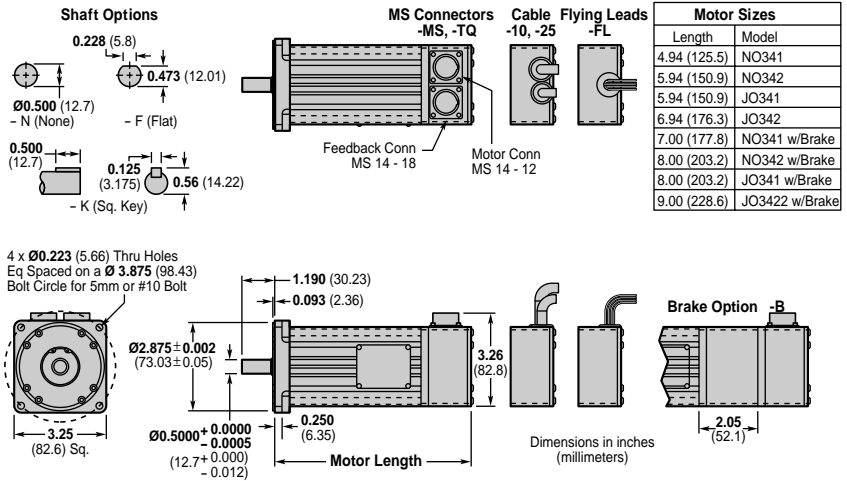

Encoder Specifications

The same type of encoder is used on all SM and NeoMetric Series motors. Encoders have either 500 lines ("-D") or 1000 lines ("-E").

Mechanical

Accuracy ± 2 min of arc

Electrical

Input power 5 VDC $\pm 5\%$, 135 mA

Operating frequency 100 kHz max

Output device 26LS31

Sink/Source, nominal 20 mA

Suggested user interface 26LS32

Hall Effect Specifications

Specifications for Hall effect outputs on SM and NeoMetric Series motors are listed below.

Electrical

Input power 5 VDC $\pm 5\%$, 80 mA

Output device, open collector LM339


Maximum pull up 12 VDC

Sink 16 mA

COMMUTATION CHART

This chart shows the relationship between motor back EMF and Hall state.

Clockwise rotation as viewed from front shaft.

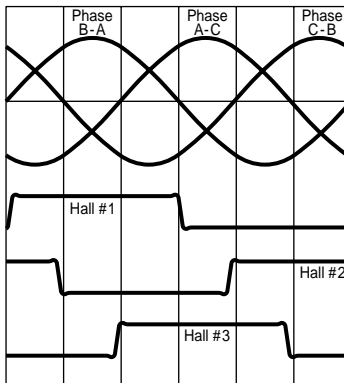

Motor Wiring Information

SM MOTORS – SIZE 16 AND SIZE 23

Motor Phase

Designation	<u>-MS Option</u>	<u>-TQ Option</u>	<u>-H Option</u>	<u>-FL Option</u> <u>-10 Option</u> <u>-25 Option</u>
	Pin No. MS14-12	Pin No. MS14-12	Pin No. MS14-12	Wire Color
Phase A	J	J	J	Red/Yellow
Phase B	K	K	K	White/Yellow
Phase C	L	L	L	Black/Yellow
Ground	M	M	M	Green/Yellow
Shield	NC	NC	NC	—
Temp	G	G	G	Orange/Yellow or Yellow
Temp	H	H	H	Orange/Yellow or Yellow

Encoder

Designation	Pin No. MS14-18	Pin No. MS14-18	Not Applicable	Wire Color
Vcc	H	H	—	Red
Ground	G	G	—	Black
CH A+	A	A	—	White
CH A-	B	B	—	Yellow
CH B+	C	C	—	Green
CH B-	D	D	—	Blue
Index +	E	E	—	Orange
Index -	F	F	—	Brown
Shield	NC	NC	—	—

Hall-effect

Designation	Pin No. MS14-18	Pin No. MS14-12	Pin No. MS14-12	Wire Color
Hall GND	K	F	F	White/Green
Hall +5	M	B	B	White/Blue
Hall 1	T	C	C	White/Brown
Hall 2	U	D	D	White/Orange
Hall 3	P	E	E	White/Violet

Wiring color is provided for flying lead or cable versions.

3 Specifications • OEM770

NEOMETRIC & J SERIES MOTORS – SIZE 070 (SIZE 034)

Motor Phase

Designation	Pin No. MS14-12	Wire Color
Phase A	J	Red/Yellow
Phase B	K	White/Yellow
Phase C	L	Black/Yellow
Ground	M	Green/Yellow
Shield	NC	—

Continue for “H” or “TQ” Options

Temp	G	Orange/Yellow or Yellow
Temp	H	Orange/Yellow or Yellow
Hall GND	F	White/Green
Hall +5	B	White/Blue
Hall 1	C	White/Brown
Hall 2	D	White/Orange
Hall 3	E	White/Violet

Encoder/Commutation Connections

Designation	Pin No. MS14-18	Wire Color
Encoder		
+5 VDC	H	Red
Ground	G	Black
CH A+	A	White
CH A-	B	Yellow
CH B+	C	Green
CH B-	D	Blue
Index +	E	Orange
Index -	F	Brown
Commutation		
Hall GND	K	White/Green
Hall +5	M	White/Blue
Hall 1	T	White/Brown
Hall 2	U	White/Orange
Hall 3	P	White/Violet
Temp	L	Orange/Yellow or Yellow
Temp	N	Orange/Yellow or Yellow
Brake Option		
Brake ¹	R	Red/Blue
Brake ¹	S	Red/Blue

¹ Brake will operate regardless of polarity of connection.