MOTOR DATA @ 460 VAC (TRAP)

MOTOR PARAMETERS		UNITS	VALUE
HORSEPOWER	HP RATED	Hp	1.8
KILOWATTS	KW RATED	KW	1.33
MAX OPERATING SPEED	N MAX	RPM	2100
SPEED @ RATED TORQUE	N RATED	RPM	1500
* CONTINUOUS RATED TORQUE @ 1500 RPM		IN-LBS[Nm]	75.0[8.4]
* CONTINUOUS STALL TORQUE		IN-LBS[Nm]	83.0[9.3]
CONTINUOUS LINE CURRENT		AMPS	3.3
PEAK TORQUE	Tpk	IN-LBS[Nm]	290.5[32.7]
PEAK CURRENT		AMPS	11.7
MAX THEORETICAL ACCEL.		RAD/SEC²	41,500
TORQUE SENSITIVITY	Kt	IN-LBS/AMP[Nm/AMP]	24.8[2.84]
BACK EMF (LINE TO LINE)	±10%	Vrms/Krpm	220.0
D.C. RESISTANCE (P-P)	±10%	OHMS	6.3
INDUCTANCE (P-P)	±10%	MILLIHENRIES	47.4
ROTOR INERTIA W/BRAKE	Jm	IN-LBS-SEC²[Kg-M²]	.0070[.00079]
STATIC FRICTION	Tf	IN-LBS[Nm]	1.4[0.16]

*25°C AMBIENT WITH A MAXIMUM CASE TEMPERATURE OF 100°C ON MOTOR. MOTOR MOUNTED ON A 12" X 12" X 1/2" ALUMINUM HEATSINK. THERMOSTAT IN STATOR WINDINGS WILL OPEN IF WINDING TEMPERATURE EXCEEDS 155°C. THIS ALLOWS FOR AN APPROXIMATE +10% HEADROOM IN THE CONTINUOUS TORQUE RATING BEFORE THERMOSTAT OPENS.

MECHANICAL NOTES:
1. AXIAL LOAD: 50 LBS MAX
2. RADIAL LOAD: 100 LBS MAX @ 1" FROM FACE
3. MOTOR SEALED TO IP65.
4. MOTOR WEIGHT: 31.8 LBS [14.4 Kg]
5. MOTOR FINISH: BLACK EPOXY
6. MOTOR OUTPUT SHAFT: STAINLESS STEEL
7. MILLIMETERS (INCHES)

CONNECTION CHART

MOTOR/BRAKE CONNECTOR: PT02E-16-8P(027) (270-00032)

MOTOR/BRAKE WIRE LEADS		
PIN	WIRE FUNCTION	WIRE COLOR
A	ΦR	RED
B	ΦS	BLACK
C	ΦT	BLUE
D	PE GND	GRN/YEL
E	BRK SHLD	–
F	BRK (+)	DIODE 1N4007
G	BRK (–)	
H	–	–

ENCODER/THERM CONNECTOR: PT02E-14-18P(027) (270-00024)

ENC/THERM WIRE LEADS		
PIN	WIRE FUNCTION	WIRE COLOR
T	GROUND	BLACK
K	+5VDC	RED
B	CH A	BLUE
C	CH A\	BLUE/BLK
N	CH B	GREEN
P	CH B\	GRN/BLK
M	CH Z	YELLOW
U	CH Z\	YEL/BLK
E	CH U	BROWN
R	CH U\	BRN/BLK
F	CH V	GRAY
S	CH V\	GRAY/BLK
G	CH W	WHITE
H	CH W\	WHT/BLK
D	GND/CABLE	SHLD
A	THERM	BLACK
L	THERM	BLACK
J	GND	GRN/YEL

ENCODER: (280-00052)
OIH48-2000P6-L6-5V

FAILSAFE BRAKE:
MIN HOLDING TORQUE: 240 IN-LBS
INPUT VOLTAGE: 24 VOLTS

TITLE	"D"/TRAP/460/MET/T2/CONN/BRK	DRAWING NUMBER	MPM1142DTJ7JN1R

REVISIONS

REV.	DESCRIPTION	DATE	APPD.
	PRELIMINARY	7/20/99	MVS

MOTOR & HALL POSITION CHART

HALL LEADS	BROWN	GRAY	WHITE
MOTOR LEADS	BLACK respect to RED	RED respect to BLUE	BLUE respect to BLACK

VIEW ON THE OSCILLOSCOPE

*MOTOR ROTATION CCW (COUNTER CLOCKWISE) (LOOKING AT THE FACE OF THE MOTOR)

WAVE REPRESENTING STATOR OUTPUT
WAVE REPRESENTING HALL SENSOR

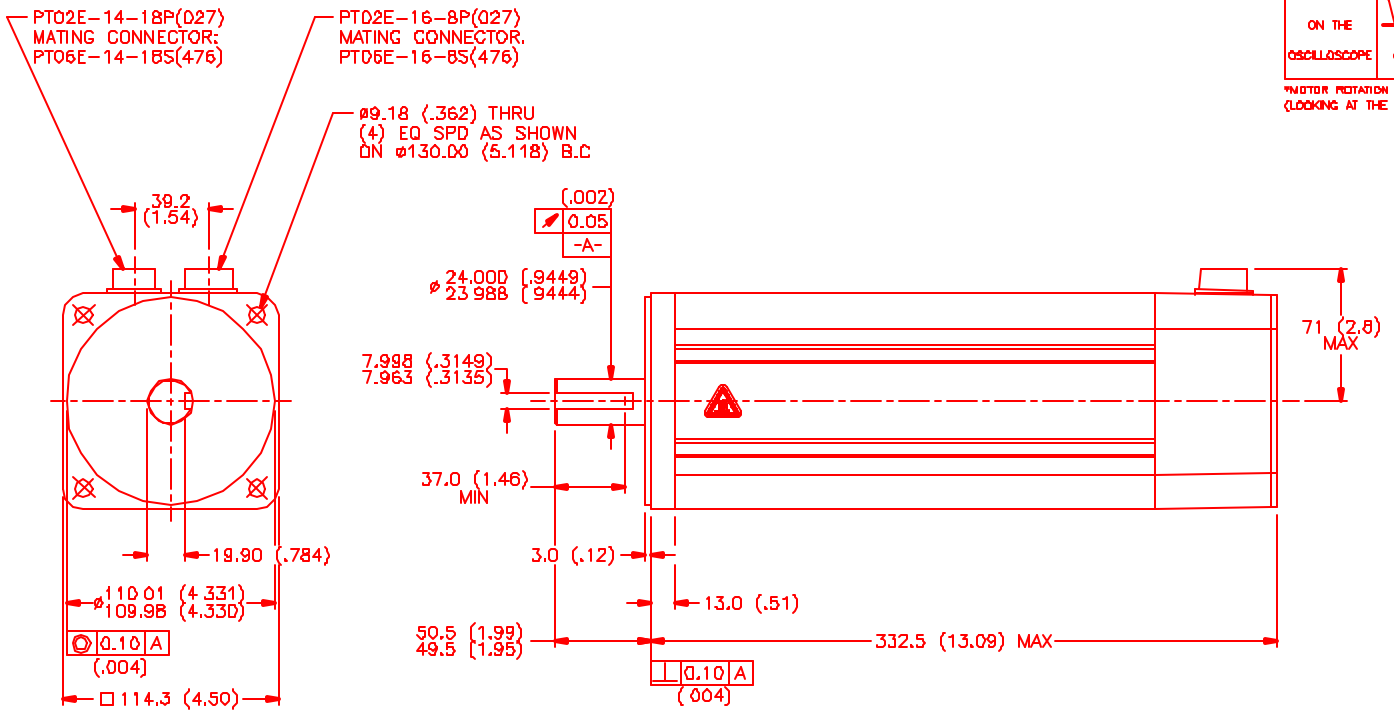



NO.	PART NUMBER	DESCRIPTION	QTY.

TOLERANCES UNLESS SPECIFIED
DECIMAL .XX ± .03
DECIMAL .X ± .03
DECIMAL .XXX ± .005
FRACTION ± 1/64
ANGLE ± 1/2°

MTS Systems Corporation
Automation Division

CONFIDENTIAL PROPRIETARY INFORMATION. THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF MTS SYSTEMS CORPORATION AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR USED FOR ANY PURPOSE EXCEPT WITH SUCH PERMISSION GRANTED IN WRITING.

DRAWN	MVS	TITLE	"D"/TRAP/460/MET/T2/CONN/BRK	REV
DATE	7/20/99			
CHECKED		MATERIAL		
APPROVED		DRAWING NUMBER	MPM1142DTJ7JN1R	SCALE 1/2:1